

Room Schedule					
Number	Name	Wall Finish	Base Finish	Floor Finish	Ceiling Finish
100	TENANT 1	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.
101	TENANT 2	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.
102	STORAGE 2	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.
103	MECH. RM 1	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.
104	MECH. RM 2	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.
105	BATH RM 1	5/8" GYP BRD.	VB	CT	5/8" GYP BRD.
106	BATH RM 2	5/8" GYP BRD.	VB	CT	5/8" GYP BRD.
107	STORAGE 1	5/8" GYP BRD.	VB	SEALED CONCRETE	5/8" GYP BRD.


Grand total: 8

Door Schedule								
Mark	Width	Height	Door Type	Door Finish	Frame Type	Frame Finish	Door Hardware	Notes
11	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
100	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
101	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
102	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
103	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
104	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	
105	3' - 0"	6' - 8"	WOOD	PAINT	WOOD	PAINT	LEVER ACTION	


Grand total: 7

Lighting Fixture Schedule		
Mark	Count	Description
A	29	SURFACED ROUND LIGHT
B	2	EMERG/BACK-UP LIGHT
C	2	EMERG/BACK-UP/EXIT LIGHT

Grand total: 33

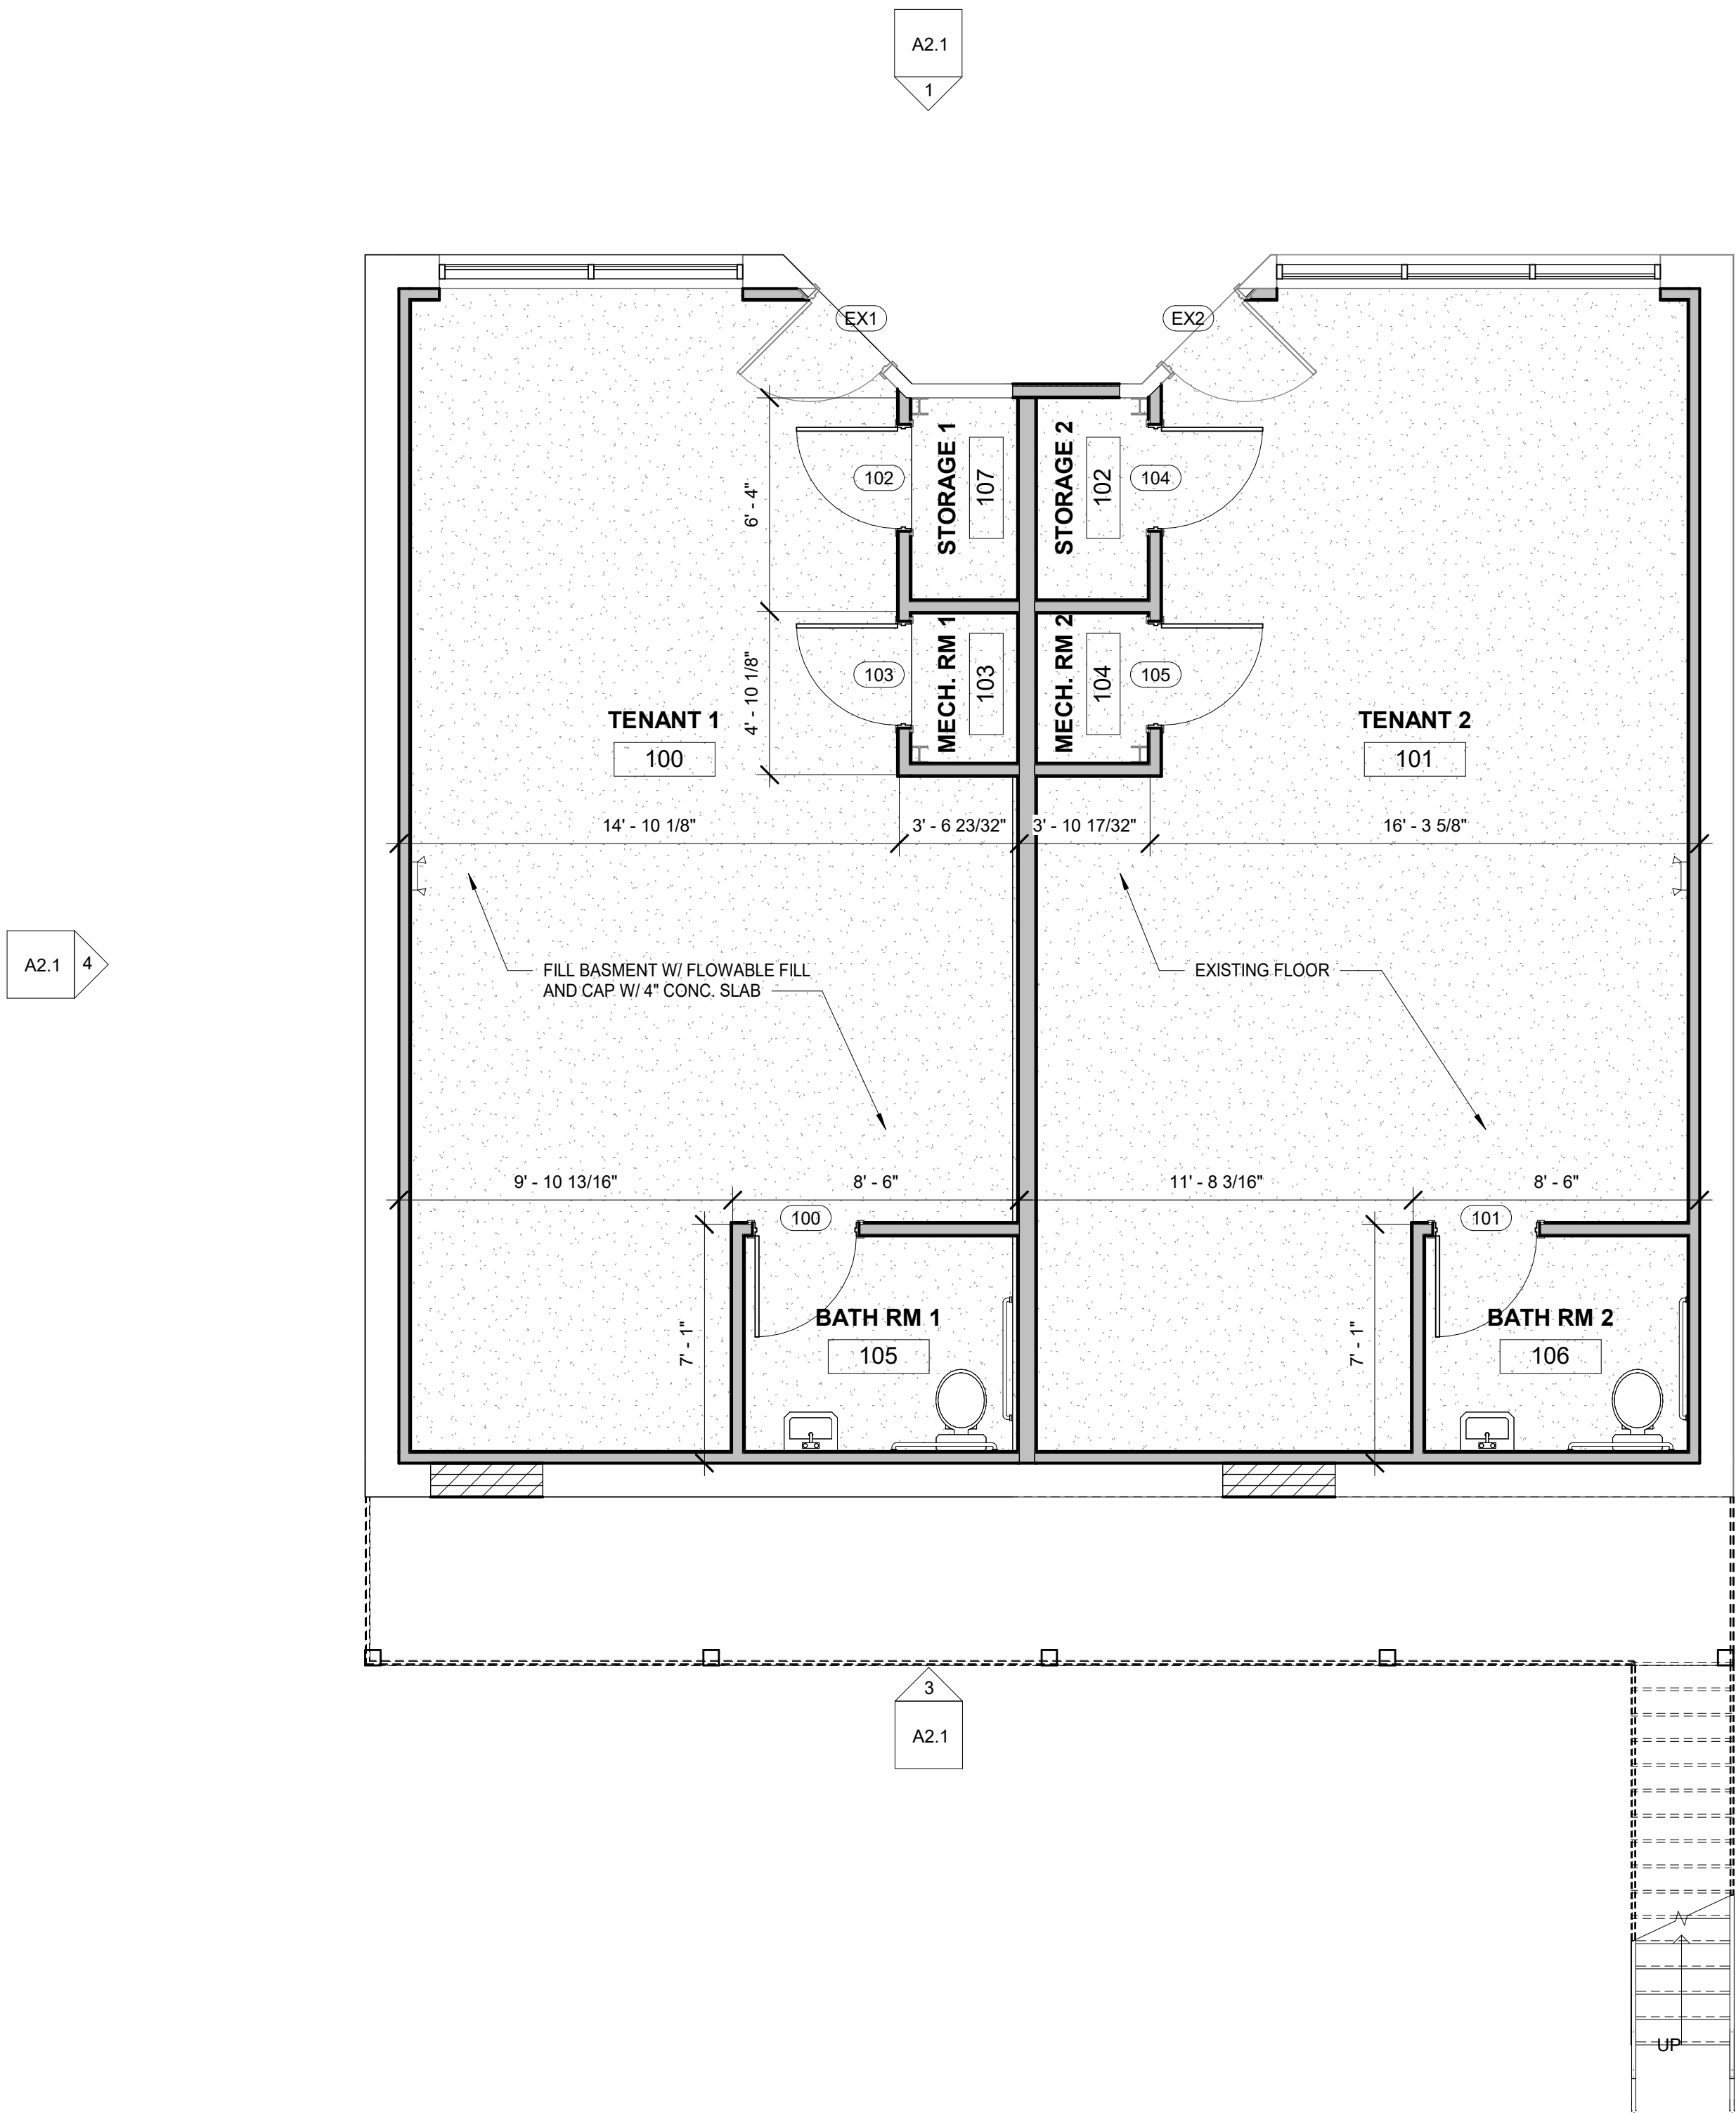

1 First Floor
1/4" = 1'-0"

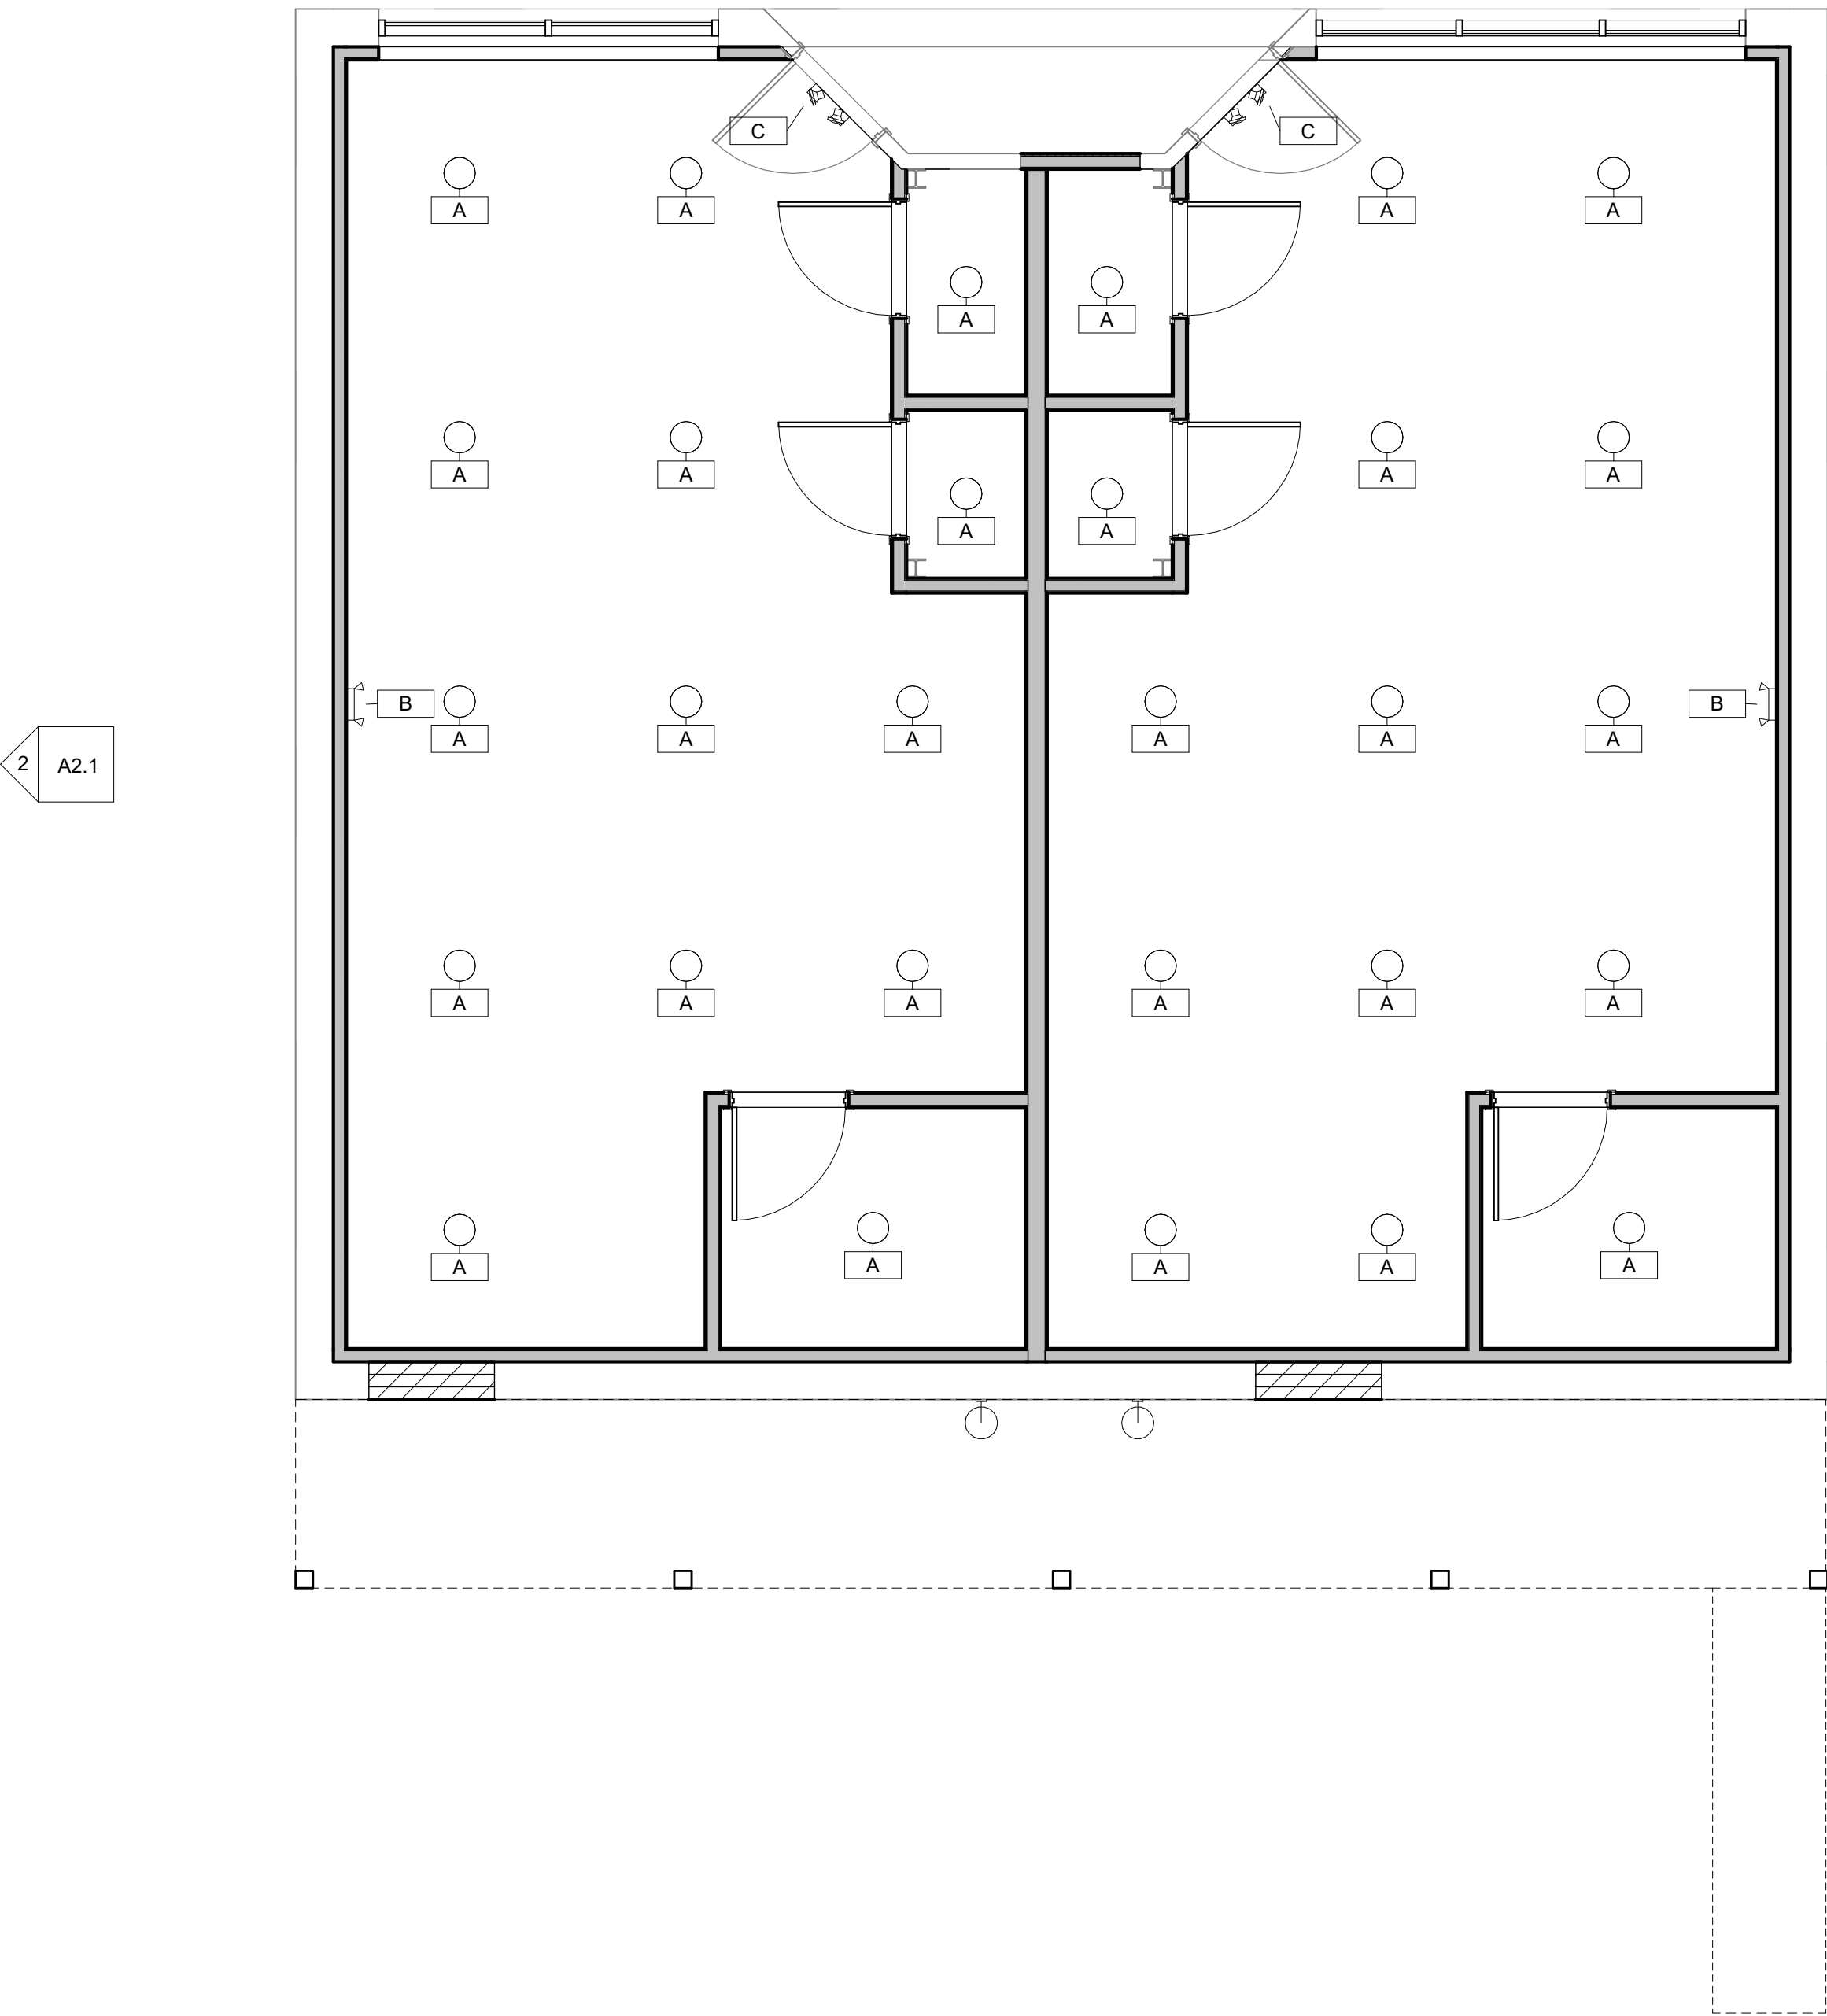

2 RCP
1/4" = 1'-0"

